

# Moisture-dependent engineering properties of black cumin (*Nigella sativa L.*) seed

Seyed Mohammad Taghi Gharib-Zahedi<sup>1</sup>, Seyed Mohammad Mousavi<sup>1</sup>, Ali moayedi<sup>1</sup>,  
Amin Taheri Garavand<sup>2</sup>, Seyed Mahdi Alizadeh<sup>3</sup>

(1. Department of Food Science and Engineering, Faculty of Biosystems Engineering, Iran;

2. Department of Agricultural Machinery Engineering, Faculty of Biosystems Engineering, Iran;

3. Department of Forest Engineering, Faculty of Natural Resource, University of Tehran, Karaj, Iran.)

**Abstract:** The moisture-dependent physical properties are important to investigate for designing the post harvest equipments of the product. The physical properties of black cumin were evaluated as a function of moisture content in the range of 5.1% to 18.75% w.b. The average length, width, thickness and 1,000 seed mass were 3.11 mm, 1.59 mm, 1.09 mm and 2.76 g, respectively, at moisture content of 5.1% w.b. The geometric mean diameter and sphericity increased from 1.75 mm to 1.79 mm and 56.34% to 56.98% as moisture content increased from 5.1% to 18.75% w.b., respectively. In the same moisture range, the bulk density decreased from 539.3 kg/m<sup>3</sup> to 486.4 kg/m<sup>3</sup>, whereas the corresponding true density and porosity increased from 1,009.4 kg/m<sup>3</sup> to 1,071.2 kg/m<sup>3</sup> and 46.5% to 54.59%, respectively. As the moisture content increased from 5.1% to 18.75% w.b., the angle of repose, terminal velocity and surface areas were found to increase from 32.5° to 33.3°, 5.6 m/s to 5.92 m/s and 8.14 mm<sup>2</sup> to 8.46 mm<sup>2</sup>, respectively. The static coefficient of friction increased on four structural surfaces namely, galvanized iron sheet (0.37-0.41), mild steel (0.36-0.39), aluminum (0.32-0.34) and plywood (0.53-0.58) in the moisture range from 5.1%-18.75% w.b.

**Key words:** black cumin, *Nigella sativa*, engineering properties, moisture content

**Citation:** Gharib-Zahedi S. M. T., S. M. Mousavi, A. moayedi, A. T. Garavand, and S. M. Alizadeh. Moisture-dependent engineering properties of black cumin (*Nigella sativa L.*) seed. *Agric Eng Int: CIGR Journal*, 2010, 12(1): 194–202.

## 1 Introduction

Black seed (*Nigella sativa L.*) is an annual herbaceous plant belonging to the *Ranunculaceae* family (Al-Gaby, 1998; Atta, 2003) which grows in countries around the Mediterranean Sea (Gad et al., 1963) as well as in other countries such as Iran. It tastes slightly bitter and peppery with a crunchy texture. Seeds are angular, of generally small size (1-5 mg), grey or black color.

Possessing health-promoting benefits, black seed is among widely used seeds and has been employed either as a medicinal grain (in traditional medicine) or as a food ingredient in several countries, including Egypt, Syria, Jordan and Iran (D'Antuono et al., 2002). For instance the seed or its paste, alone or mixed with other food

ingredients such as honey or syrup, is commonly used as a flavoring agent in different dishes such as bread and cheese (Merfort et al., 1997). The oil obtained from black seed as well as its extract exhibit protective and curative actions (reference needed). The oil has been reported to show anti-tumor (Worthen et al., 1998), anti-oxidant (Burits and Bucar, 2000), anti-inflammatory (Houghton et al., 1995), and antibacterial (Morsi, 2000) activities. It also shows a stimulatory effect on the immune system (Salem and Hossain, 2000). Because of its favorable effects on human nutrition and health, black seed oil is now considered as a new source of edible oil.

The knowledge of the morphology and size distribution of black seeds is essential for the accurate design of the equipment for cleaning, grading and separation. Gravimetric properties are important in design of equipment related to aeration, drying, storage

Received date: 2009-06-19 Accepted date: 2009-12-23

Corresponding author's email: Gharibzahedi@ut.ac.ir

and transport. Bulk density determines the capacity of storage and transport systems, while true density is useful for separation equipment; porosity of the mass of seeds determines the resistance to air flow during aeration and drying of seeds. The frictional properties such as the angle of repose and the coefficient of external friction are recognized by engineers as important properties concerned with rational design of seed bins and other storage structures including the compressibility and flow behavior of materials. Aerodynamic properties such as terminal velocity are useful for air conveying or pneumatic separation of materials in such a way that when the air velocity is greater than the terminal velocity, it lifts the particles. The air velocity at which the seed remains in suspension is considered as terminal velocity (Kachru et al., 1994).

In this communication an effort has been made to determine some moisture-dependent physical properties of black cumin, namely, linear dimensions, size, sphericity, surface area, 1,000 seed mass weight, bulk density, true density, porosity, angle of repose, terminal velocity and static coefficient of friction in the moisture range of 5.1% ~ 18.75 % (w.b).

## 2 Materials and methods

### 2.1 Materials

Black seeds were used for all the experiments in this study (Figure 1). The seeds were obtained from the local market during June to July, 2008 in a city located in the west of capital Tehran and kept in cooled bags during transportation to the laboratory. The seeds were cleaned in an air screen cleaner to remove all foreign materials such as dust, dirt and chaff as well as immature and damaged seeds. The initial moisture content of the seeds, as brought from the market, was determined by drying samples in a hot air oven set at  $(105 \pm 1)^\circ\text{C}$  for 24h and was found to be 5.1% w.b. The drying condition was decided based on preliminary studies and in reference to ASAE standards S352.3 (ASAE, 1994). In order to achieve the desired moisture levels for the study, samples were conditioned by adding a calculated amount of water based on Eq. (1) (Balasubramanian, 2001;

Dursun and Dursun, 2005) followed by a thorough mixing and sealing in plastic bags.

$$Q = \frac{W_i(M_f - M_i)}{100 - M_f} \quad (1)$$


Where:  $Q$  is the mass of water to be added in kg;  $W_i$  is the initial mass of the sample in kg;  $M_i$  is the initial moisture content of the sample in percentage (% w.b.) and  $M_f$  is the final moisture content in percentage (% w.b.). The samples were kept in a refrigerator at  $(5 \pm 1)^\circ\text{C}$  for seven days for the moisture to distribute uniformly throughout the seed (Carman, 1996; Aydin, 2002; Aydin et al., 2002). The moisture content of samples after equilibration was determined before each test. Accordingly, moisture levels of 5.1%, 9.8%, 12.7% and 18.75% w.b. were obtained. The required quantity of samples was withdrawn from the refrigerator and reconditioned at room temperature ( $\approx 25^\circ\text{C}$ ) before conducting each test. Every test was repeated five times to determine mean values.



Figure 1 Black cumin seeds (*Nigella Sativa L.*).

### 2.2 Physical properties measurement

In order to determine the one thousand seeds mass ( $m_{1000}$ ), one hundred seeds of black seeds were counted by an electronic counter machine and then these seeds were weighed by means of an electronic scale with 0.01 g accuracy and finally extrapolating this mass to 1,000 seeds. The average size of the seeds was determined by measuring three linear dimensions (namely, length  $L$ , width  $W$  and thickness  $T$ ) of 100 seeds which were randomly picked. A digital vernier caliper with an accuracy of 0.01 mm was employed (Figure 2).

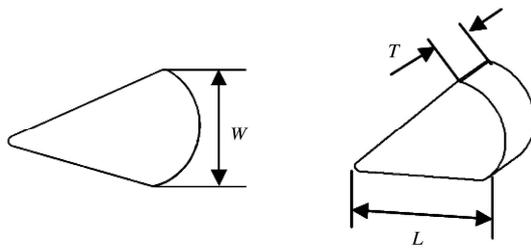

Note:  $L$ , length;  $W$ , width;  $T$ , thickness

Figure 2 Characteristic dimensions of black cumin seeds

The average diameter of the seeds was presented as the arithmetic mean and geometric mean of the three axial dimensions. The geometric mean diameter ( $D_g$ ) and the arithmetic mean diameter ( $D_a$ ) were calculated for the three principal dimensions as follows (Mohsenin, 1986):

$$D_g = (LWT)^{1/3} \quad (2)$$

$$D_a = \frac{(L+W+T)}{3} \quad (3)$$

Where:  $m_{1000}$  is the one thousand seeds mass in g.

The sphericity of the seed was determined using the following equation (Mohsenin, 1986):

$$\phi = \frac{(LWT)^{1/3}}{L} \quad (4)$$

Where:  $\phi$  is the sphericity;  $L$  is the length in mm;  $W$  is the width in mm; and  $T$  is the thickness in mm.

Seed volume ( $V$ ) and surface area ( $S$ ) were calculated using the following equations (Jain and Bal, 1997):

$$V = 0.25 \left[ \left( \frac{\pi}{6} \right) L(W+T)^2 \right] \quad (5)$$

$$S = \frac{\pi BL^2}{(2L-b)} \quad (6)$$

Where:  $B = \sqrt{WT}$  (7)

The bulk density ( $\rho_b$ ) of black seeds were measured by filling an empty glass container of predetermined volume and net weight with the seeds by pouring from a constant height, striking off the top level and weighing. The ratio of the mass and volume was expressed as bulk density (Varnamkhasti et al., 2008). During the experiment, care was taken to avoid any compaction of the material in the container.

The true density ( $\rho_t$ ) was determined using Toluene

displacement method (Mohsenin, 1986). Toluene ( $C_7H_8$ ) was used in place of water because it is absorbed by seeds to lesser extent. In addition, its surface tension is low, so that it fills even shallow dips in a seed and its dissolution power is low (Kabas et al., 2007; Demir et al., 2002).

The porosity ( $\varepsilon$ ) of black seeds was determined by the following equation:

$$\varepsilon = \frac{(\rho_t - \rho_b)}{\rho_t} \times 100 \quad (8)$$

Where:  $\varepsilon$  is the porosity in percentage (%);  $\rho_b$  is the bulk density in  $kg/m^3$  and  $\rho_t$  is the true density in  $kg/m^3$  (Mohsenin, 1986).

The angle of repose is the angle with respect to the horizontal at which the material will stand when piled. This was determined by using an apparatus consisting of a plywood box of 140 mm×160 mm×35 mm and two plates: fixed and adjustable (Figure 3). The box was filled with the sample, and then the adjustable plate was inclined gradually allowing the seeds to flow and assume a natural slope, this was measured as emptying angle of repose (Varnamkhasti et al., 2008; Tabatabaefar, 2003).

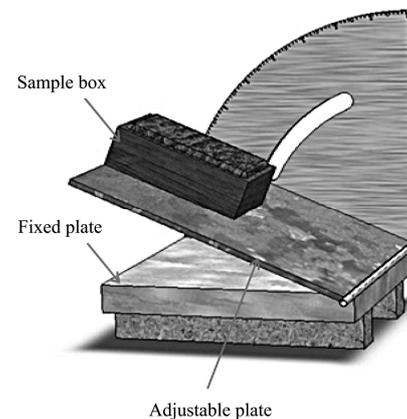


Figure 3 Apparatus for measuring the angle of repose

The friction static coefficients against different surfaces, plywood, mild steel, aluminum and galvanized iron sheet were determined by using a cylinder of diameter 75 mm and depth of 50 mm filled with seeds (Figure 4). With the cylinder resting on the surface, the surface was raised gradually until the filled cylinder just started to slide down (Razavi and Milani, 2006).

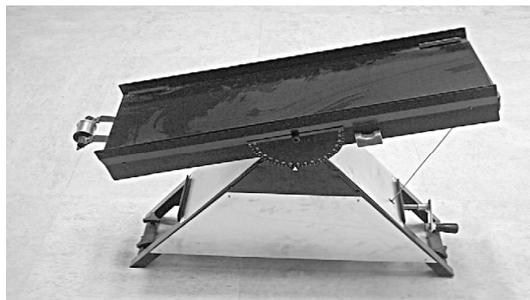


Figure 4. Apparatus for measuring static coefficient of friction.

Terminal velocity ( $V_t$ ) was measured by using an air column system. For each experiment, a sample was dropped into the air stream from the top of the air column, up which air was blown to suspend the material in the air stream. The air velocity near the location of the seed suspension was measured by a hot wire anemometer having a least count of 0.01 m/s (Akinici et al., 2004).

### 3 Results and discussion

#### 3.1 Seed dimensions

The experimental data on the seed dimensions were shown in Table 1. The three axial dimensions increased with moisture content. The increase in the dimensions are attributed to expansion or swelling as the result of moisture uptake in the intracellular spaces within the seeds. The length, width and thickness of seeds ranged from 3.11 mm to 3.145 mm, 1.59 mm to 1.62 mm, and 1.09 mm to 1.13 mm respectively as the moisture content increased from 5.1% to 18.75% w.b. The increases in length, width and thickness were 1.12%, 1.88% and 3.66%, respectively. The average diameters increased with moisture content. The arithmetic and geometric mean diameters increased from 5.06 mm to 5.14 mm and 1.75 mm to 1.79 mm as the moisture content increased from 5.1% to 18.75% w.b., respectively.

**Table 1 Means and standard errors of the axial dimensions of castor seeds at different moisture contents**

Moisture (% d.b.)	Axial dimension/mm			Average diameter/mm	
	Length (L)	Width (W)	Thickness (T)	Arithmetic mean ( $D_a$ )	Geometric mean ( $D_g$ )
5.1	3.11±0.05	1.59±0.04	1.09±0.07	5.06	1.75
9.8	3.12±0.23	1.6±0.33	1.1±0.05	5.08	1.76
12.7	3.14±0.14	1.61±0.12	1.12±0.04	5.12	1.78
18.75	3.145±0.35	1.62±0.04	1.13±0.03	5.14	1.79

#### 3.2 One thousand seed mass

The one thousand black cumin seeds' mass increased linearly from 2.76 g to 3.01 g as the moisture content increased from 5.1% to 18.75% w.b. (Figure 5). Accordingly, an increase of 9.05% in the one thousand seed mass was recorded within the above moisture range. This parameter is useful in determining the equivalent diameter which can be used in the theoretical estimation of seed volume and in cleaning using aerodynamic force. The linear equation for one thousand seed mass ( $m_{1000}$ ) can be formulated to be:

$$m_{1000} = 2.659 + 0.019Mc \quad (R^2 = 0.942) \quad (9)$$

Similar to the present observations, a linear increase in the one thousand seed mass as the seed moisture content increases has been noted by Ozarslan (2002) for cotton seed, Sacilik et al. (2003) for hemp seed, Yalcin and Ozarslan (2004) for vetch, Cagatay Selvi (2006) for linseed, Coskuner and Karababa (2007) for flaxseed, Isik and Izli (2007) for sunflower seed and Cahsir et al. (2005) for rapeseed.

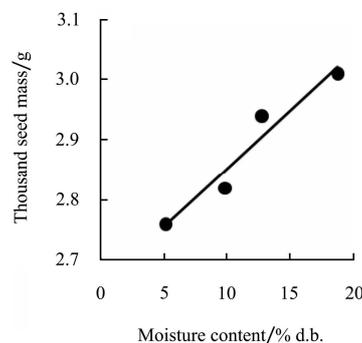


Figure 5 Effect of moisture content on the one thousand seed mass of black cumin seed

#### 3.3 Sphericity

Sphericity of black cumin seed increased from 56% to 56.98% as the result of increasing the moisture content (Figure 6). This indicates that relatively proportional changes occurred in the dimensions of seeds used for the calculation of sphericity (Eq. (3)). The relationship between sphericity ( $\phi$ ) and moisture content  $Mc$  in percentage (% w.b.) can be represented by the following equation:

$$\phi = 54.77 + 0.768 \ln Mc \quad (R^2 = 0.993) \quad (10)$$

Similar trends have been reported by Aydin et al. (2002) for Turkish Mahaleb, Sahoo and Srivastava (2002)

for okra seed, Sacilik et al. (2003) for hemp seed, Coskuner and Karababa (2007) for flaxseed and Altuntas et al. (2005) for fenugreek seed.

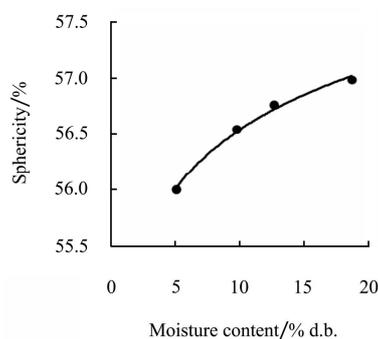


Figure 6 Effect of moisture content on the sphericity of black cumin seed

### 3.4 Volume

The volume of black cumin seed was observed to increase linearly from 2.92 mm<sup>3</sup> to 3.08 mm<sup>3</sup> with the increase in moisture content (Figure 7). The linear equation for seed volume ( $V$ ) can be formulated to be:

$$V = 2.857 + 0.012Mc \quad (R^2 = 0.989) \quad (11)$$

Similar trends of increase have been reported by Ogut (1998) and Baryeh (2002) for white lupin and millet, respectively.

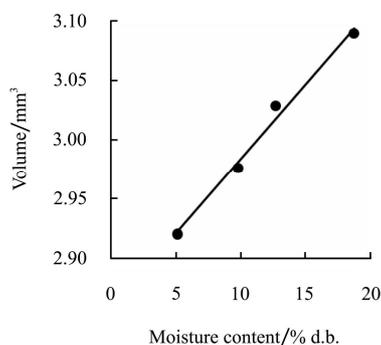


Figure 7 Effect of moisture content on the volume of black cumin seed

### 3.5 Surface area

The surface area of the black cumin seed increased from 8.14 mm<sup>2</sup> to 8.46 mm<sup>2</sup> as the moisture content increased from 5.1% to 18.75% w.b. (Figure 8). The relationship between moisture content and surface area ( $S$ ) appears linear and can be represented by the regression equation:

$$S = 8.023 + 0.024Mc \quad (R^2 = 0.989) \quad (12)$$

Similar trends of increase have been reported by Sacilik et al. (2003) and Baryeh (2002) for hemp seed and millet, respectively.

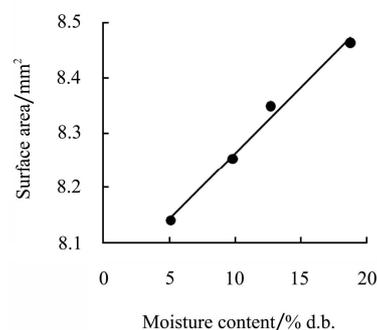


Figure 8 Effect of moisture content on the surface area of black cumin seed

### 3.6 Bulk density

The bulk density decreased from 539.3 kg/m<sup>3</sup> to 486.4 kg/m<sup>3</sup> as the moisture content increased from 5.1% to 18.75% w.b. (Figure 9). The decrease in bulk density with increase in moisture content showed that the increase in mass resulting from the moisture gain of the sample is lower than the accompanying volumetric expansion of the bulk. The relationship between bulk density ( $\rho_b$ ) and moisture content can be represented by the following regression equation:

$$\rho_b = 559.4 - 4.029Mc \quad (R^2 = 0.956) \quad (13)$$

The negative linear relationship of bulk density with moisture content has been observed with other products by various research workers (Shepherd and Bhardwaj, 1986; Deshpande et al., 1993; Gupta and Das, 1997; Dutta et al., 1988; Bart-Plange and Baryeh, 2003).

### 3.7 True density

The true density varied from 1,009.4 kg/m<sup>3</sup> to 1,071.2 kg/m<sup>3</sup> when the moisture level increased from 5.1% to 18.75% w.b. (Figure 9). The increase in true density varies with increase in moisture content might be attributed to the relatively lower true volume as compared to the corresponding mass of the seed attained due to adsorption of water. The true density ( $\rho_t$ ) and the moisture content of seed can be correlated as follows:

$$\rho_t = 987.5 + 4.554Mc \quad (R^2 = 0.992) \quad (14)$$

The results were similar to those reported by Singh and Goswami (1996) for cumin seed and Ozarslan (2002) for cottonseed.

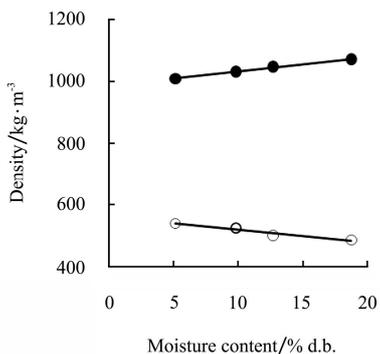


Figure 9 Effect of moisture content on the bulk (○) and true (●) density of black cumin seed

### 3.8 Porosity

The porosity of black cumin seed increased from 46.5% to 54.59% with the increase in moisture content from 5.1% to 18.75% w.b. (Figure 10). This could be attributed to the expansion and swelling of seeds that might have resulted in more voids space between the seeds and increased the bulk volume. This is also exhibited in the reduction of bulk density with increase in moisture content. The relationship between porosity ( $\epsilon$ ) and moisture content can be represented by the following equation:

$$\epsilon = 43.58 + 0.607Mc \quad (R^2 = 0.971) \quad (15)$$

Gupta and Das (1997) for sunflower, Carman (1996) for lentil and Singh and Goswami (1996) for cumin seeds stated that as the moisture content increased so the porosity value increased.

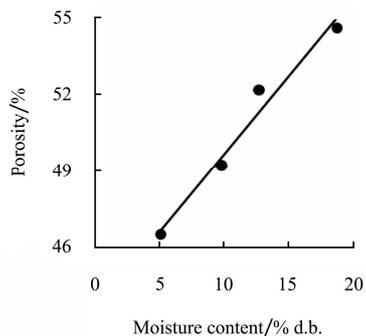


Figure 10 Effect of moisture content on porosity of black cumin seed

### 3.9 Terminal velocity

As the moisture content increased, the terminal velocity was found to increase linearly from 5.6 m/s to 5.92 m/s in the specified moisture range (Figure 11).

The increase in terminal velocity with increase in moisture content within the range studied can be attributed to the increase in mass of an individual seed per unit frontal area presented to the air stream. The relationship between moisture content and terminal velocity ( $V_t$ ) can be represented by the following equation:

$$V_t = 5.481 + 0.024Mc \quad (R^2 = 0.961) \quad (16)$$

Singh and Goswami (1996), Suthar and Das (1996), Nimkar and Chattopadhyay (2001), Gezer et al. (2002), Konak et al. (2002) and Sacilik et al. (2003) have reported a linear increase in terminal velocity with increase in the moisture content for cumin seed, karingda seed, green gram, apricot kernel, chick pea seed and hemp seed, respectively.

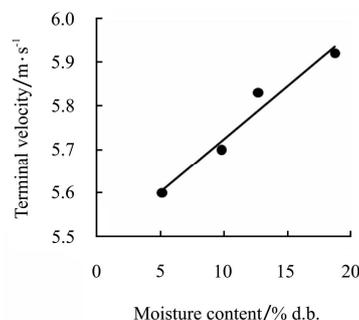


Figure 11 Effect of moisture content on terminal velocity of black cumin seed

### 3.10 Angle of repose

The angle of repose increased from 32.5° to 33.3° in the moisture range of 5.1%~18.75% w.b. (Figure 12). At higher moisture content seeds might tend to stick together due to the plasticity effect (stickiness) over the surface of the seeds resulting in better stability and less flowability thereby increasing the angle of repose (Irtwange and Igbeka, 2002). The angle of repose is of paramount importance in designing hopper openings, side wall slopes of storage bins and bulk transporting of seeds using chutes (Elaskar et al., 2001; Irtwange and Igbeka, 2002). Therefore, moisture content of seeds should be taken into account while designing such equipments and structures. The relationship between angle of repose ( $\alpha$ ) and moisture content can be represented by the following regression equation:

$$\alpha = 32.18 + 0.061Mc \quad (R^2 = 0.932) \quad (17)$$

Singh and Goswami (1996), Nimkar and Chattopadhyay (2001), Baryeh (2002), Amin et al. (2004) and Altuntas et al. (2005) reported a linear increase in angle of repose with increase in the moisture content for cumin seed, green gram, millet, lentil and fenugreek, respectively.

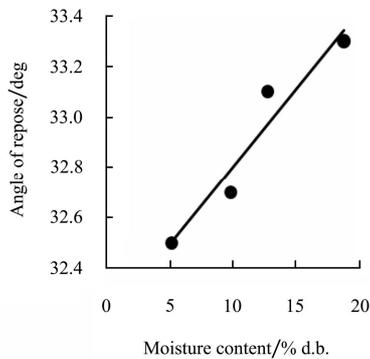


Figure 12 Effect of moisture content on angle of repose of black cumin seed

### 3.11 Static coefficient of friction

The static coefficient of friction increased with increase in moisture content on all surfaces (Figure 13). The design of the dimension of hoppers, bunker silos and other bulk solid storage and handling structures should ensure non-arching (avoid stoppage of flow of bulk solids) phenomena. The coefficient of mobility represents the freedom of motion of a substance and it is inversely related to coefficient of friction (tangent of angle of internal friction) (Irtwange and Igbeka, 2002). The higher the coefficient of friction is, the lower the mobility coefficient is, hence requiring larger hopper opening,

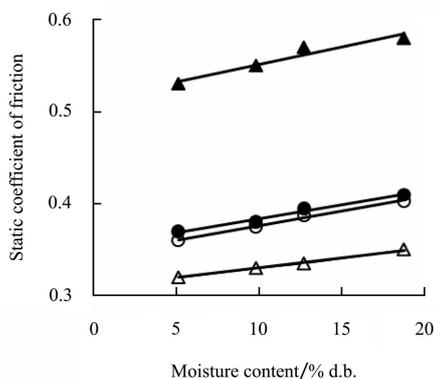


Figure 13. Effect of moisture content on static coefficient of friction: (●) galvanized iron sheet; (○) mild steel, (▲) plywood and (△) aluminum

larger hopper side wall slope and steeper angle of inclination in inclined grain transporting equipments like chutes (Elaskar et al., 2001; Irtwange and Igbeka, 2002) to avoid immature flow (where some depth of granular particles remain stationary) and the arching phenomena in order to ensure a fully developed sliding flow. Tsang-Mui-Chung et al. (1984), Dutta et al. (1988), Joshi et al. (1993), Carman (1996), Ogut (1998), Peker (1996) and Aydin (2002) reported that as the moisture content increased as the coefficient of static friction increased.

At all moisture contents, the static coefficient of friction was greatest against plywood (0.53–0.58), followed by galvanized iron sheet (0.37–0.41), mild steel (0.36–0.39) and least for aluminum (0.32–0.34). The linear equations for static coefficient of friction ( $\mu$ ) on all test surfaces can be represented as:

$$\mu = A + BMc \quad (18)$$

Where:  $\mu$  is the coefficient of friction, and  $A$  and  $B$  are the intercept and regression coefficient respectively. These values are given in Table 2.

Table 2 Intercepts, regression coefficients and coefficients of determination ( $R^2$ ) of Eq. (18) for static coefficients of friction on various test surfaces

Surface type	Intercept	Regression coefficient	$R^2$
	A	B	
Plywood	0.514	0.003	0.932
Galvanized iron sheet	0.353	0.003	0.977
Mild steel	0.344	0.003	0.993
Aluminum	0.308	0.002	0.995

## 4 Conclusions

The following conclusions were drawn from this investigation on physical and nutritional properties of black cumin seeds for the moisture content range of 5.1% to 18.75% w.b.

1) The thousand seed mass increased from 2.76g to 3.01 g and the sphericity increased from 56% to 56.98% with the increase in moisture content from 5.1% ~ 18.75% w.b.

2) The surface area increased from 8.14 mm<sup>2</sup> to 8.46 mm<sup>2</sup> and the porosity increased from 46.5% to 54.59%.

3) The bulk density decreased linearly from 539.3 kg/m<sup>3</sup> to 486.4 kg/m<sup>3</sup> whereas the true density

increased from 1,009.4 kg/m<sup>3</sup> to 1,071.2 kg/m<sup>3</sup>.

4) The terminal velocity increased from 5.6 m/s to 5.92 m/s and angle of repose increased from 32.5° to 33.3° in the moisture range from 5.1% to 18.75% w.b.

5) The static coefficient of friction increased on four structural surfaces namely, galvanized iron sheet (0.37-0.41), mild steel (0.36–0.39), aluminum (0.32-0.34) and plywood (0.53–0.58) in the moisture range from

5.1% to 18.75% w.b.

## Acknowledgements

The authors would like to thank the University of Tehran for providing the laboratory facilities and financial support for this project. The authors are also grateful to Sima Gholizade Kandi, Seyed Yousef Gharib-Zahedi and Parang Nikmaram for their help.

## References

- Akinci, I., F. Ozdemir, A. Topuz, O. Kabas, and M. Canakci. 2004. Some physical and nutritional properties of *Juniperus drupacea* fruits. *Journal of Food Engineering*, 65, 325–331.
- Al-Gaby, A. M. A. 1998. Amino acid composition and biological effects of supplementing broad bean and corn proteins with *Nigella sativa* (black cumin) cake protein. *Nahrung*, 42, 290–294.
- Altuntas, E., E. Ozgoz, and O. F. Taser. 2005. Some physical properties of fenugreek (*Trigonella foenum-graceum* L.) seeds. *Journal of Food Engineering*, 71, 37–43.
- Amin, M. N., M. A. Hossain, and K. C. Roy. 2004. Effect of moisture content on some physical properties of lentil seeds. *Journal of Food Engineering*, 65, 83–87.
- ASAE. 1994. Moisture measurement-ungrounded grains and seeds. S352.3, 469.
- Aydin, C. 2002. Physical properties of hazel nuts. *Biosystems Engineering*, 65, 297–303.
- Aydin, C., H. Ogut, and M. Konak. 2002. Some physical properties of Turkish Mahaleb. *Biosystems Engineering*, 82, 231–234.
- Balasubramanian, D. 2001. Physical properties of raw cashew nut. *Journal of Agricultural Engineering Research*, 78, 291–297.
- Bart-Plange, A., and E. A. Baryeh. 2003. The physical properties of category B cocoa beans. *Journal of Food Engineering*, 60, 219–227.
- Baryeh, E. A. 2002. Physical properties of millet. *Journal of Food Engineering*, 51, 39–46.
- Burits, M., and F. Bucar. 2000. Antioxidant activity of *Nigella sativa* essential oil. *Phytotherapy Research*, 14, 323–328.
- Cagatay Selvi, K., Y. Pinar, and E. Yesiloglu. 2006. Some physical properties of linseed. *Biosystems Engineering*, 95, 607–612.
- Cahsir, S., T. Marakoglu, H. Ogut, and O. Ozturk. 2005. Physical properties of rapeseed (*Brassica napus oleifera* L.). *Journal of Food Engineering*, 69, 61–66.
- Carman, K. 1996. Some physical properties of lentil seeds. *Journal of Agricultural Engineering Research*, 63, 87–92.
- Coskuner, Y., and E. Karababa. 2007. Some physical properties of flaxseed (*Linum usitatissimum* L.). *Journal of Food Engineering*, 78, 1067–1073.
- D'Antuono, L. F., A. Moretti, and A. F. S. Lovato. 2002. Seed yield, yield components, oil content and essential oil content and composition of *Nigella ssativa* L. and *Nigella damascena* L. *Industrial Crops and Products*, 15, 59–69.
- Demir, F., H. Dogan, H. Ozcan, and H. Haciseferogullari. 2002. Nutritional and physical properties of hackberry (*Celtis australis* L.). *Journal of Food Engineering*, 54, 241–247.
- Deshpande, S. D., S. Bal, and T. P. Ojha. 1993. Physical properties of soybean. *Journal of Agricultural Engineering Research*, 56, 89–98.
- Dursun, E., and I. Dursun. 2005. Some physical properties of caper seed. *Biosystem Engineering*, 92, 237-245.
- Dutta, S. K., V. K. Nema, and R. K. Bhardwaj. 1988. Physical properties of gram. *Journal of Agricultural Engineering Research*, 39, 259–268.
- Elaskar, S. A., L. A. Godoy, D. Mateo, and G. Seeber. 2001. An experimental study of the gravity flow of sorghum. *Journal of Agricultural Engineering Research*, 79, 65–71.
- Gad, A. M., M. El-Dakhkhny, and M. Hassan. 1963. Studies on the chemical composition of Egyptian *Nigella sativa* L. oil. *Planta Medica*, 11, 134–138.
- Gezer, I., H. Haciseferogullari, and F. Demir. 2002. Some physical properties of Hacıhaliloglu apricot pit and its kernel. *Journal of Food Engineering*, 56, 49–57.
- Gupta, R. K., and S. K. Das. 1997. Physical properties of sunflower seeds. *Journal of Agricultural Engineering Research*, 61, 1–8.
- Houghton, P. J., R. Zarka, B. D. Heras, and J. R. S. Hoult. 1995. Fixed oil of *Nigella sativa* and derived thymoquinone inhibit eicosanoid generation in leukocytes and membrane lipid peroxidation. *Planta Medica*, 61, 33–36.
- Irtwange, S. V., and J. C. Igbeka. 2002. Flow properties of African yam bean (*Sphenostylis stenocarpa*) as affected by accession

- and moisture content. Transaction of the ASAE, 45, 1063–1070.
- Isik, E., and N. Izli. 2007. Physical properties of sunflower seeds. International Journal of Agriculture Reaserch, 2, 677–686.
- Jain, R. K., and S. Bal. 1997. Properties of pearl millet. Journal of Agricultural Engineering Research, 66, 85–91.
- Joshi, D. C., S. K. Das, and R. K. Mukherjee. 1993. Physical properties of pumpkin seeds. Journal of Agricultural Engineering Research, 54, 219–229.
- Kabas, O., E. Yilmaz, A. Ozmerzi, and I. Akinci. 2007. Some physical and nutritional properties of cowpea seed (*Vigna sinensis L.*). Journal of Food Engineering, 79, 1405–1409.
- Kachru, R. P., R. K. Gupta, and A. Alam. 1994. Physico-chemical Constituents and Engineering Properties. Scientific Publishers, Jodhpur, India.
- Konak, M., K. Carman, and C. Aydin. 2002. Physical properties of chick pea seeds. Biosystems Engineering, 82, 73–78.
- Merfort, I., V. Wray, H.H. Barakat, S.A.M. Hussein, M.A.M. Nawwar, and G. Willuhn. 1997. Flavonoid triglycerides from seeds of *Nigella sativa*. Phytochemistry, 46, 359–363.
- Mohsenin, N. N. 1986. Physical properties of plant and animal materials. Gordon and Breach Science Publications, New York.
- Morsi, N. M. 2000. Antimicrobial effect of crude extracts of *Nigella sativa* on multiple antibiotics-resistant bacteria. Acta Microbiologica Polonica, 49, 63–74.
- Nimkar, P. M., and P. K. Chattopadhyay. 2001. Some physical properties of green gram. Journal of Agricultural Engineering Research, 80, 183–189.
- Ogut, H. 1998. Some physical properties of white lupin. Journal of Agricultural Engineering Research, 69, 273–277.
- Ozarslan, C. 2002. PH – postharvest technology: Physical properties of cotton seed. Biosystems Engineering, 83, 169–174.
- Peker, A. 1996. The determination of some physical properties of corn kernel. Selcuk University the Journal of Agricultural Faculty, 10, 22–65.
- Razavi, S., and E. Milani. 2006. Some physical properties of the watermelon seeds. Africian Journal of Agricultural Research, 13, 65–69.
- Sacilik, K., R. Ozturk, and R. Keskin. 2003. Some physical properties of hemp seed. Biosystems Engineering, 86, 191–198.
- Sahoo, P. K., and A. P. Srivastava. 2002. Physical properties of okra seed. Biosystems Engineering, 83, 441–448.
- Salem, M. L., and M. S. Hossain. 2000. In vivo acute depletion of CD8 (+) T cells before murine cytomegalovirus infection up regulated innate antiviral activity of natural killer cells. International Journal of Immunopharmacology, 22, 707–718.
- Shepherd, H., and R.K. Bhardwaj. 1986. Moisture-dependent physical properties of pigeon pea. Journal of Agricultural Engineering Research, 35, 227–234.
- Singh, K. K., and T. K. Goswami. 1996. Physical properties of Cumin seed. Journal of Agricultural Engineering Research, 64, 93–98.
- Suthar, S. H., and S. K. Das. 1996. Some physical properties of karingda [*Citrullus lanatus (Thumb) Mansf*] seeds. Journal of Agricultural Engineering Research, 65, 15–22.
- Tabatabaeefar, A. 2003. Moisture-dependent physical properties of wheat. International Agrophysics, 17, 207–211.
- Tsang-Mui-Chung, M., L.R. Verma, and M.E. Wright. 1984. Adevice for friction measurement of grains. Transaction of the ASAE, 27, 1938–1941.
- Varnamkhasti, M. G., H. Mobli, A. Jafari, A. R. Keyhani, M. H. Soltanabadi, S. Rafiee, and K. Kheiralipour. 2008. Some physical properties of rough rice (*Oryza Sativa L.*) grain. Journal of Cereal Science, 47, 496–501.
- Worthen, D. R., O. A. Ghosheh, and P. A. Crooks. 1998. The in vitro anti-tumor activity of some crude and purified components of blackseed, *Nigella sativa L.* Anticancer Research, 18, 1527–1532.
- Yalcin, I., and C. Ozarslan. 2004. Physical properties of vetch seed. Biosystems Engineering, 88, 507–512.